


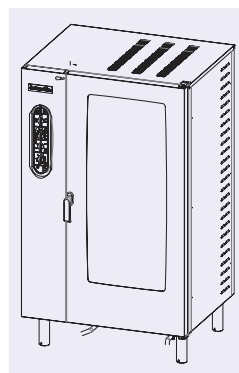


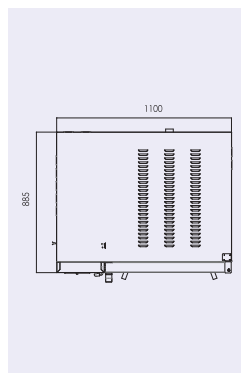


OKFE 202
Convection Oven

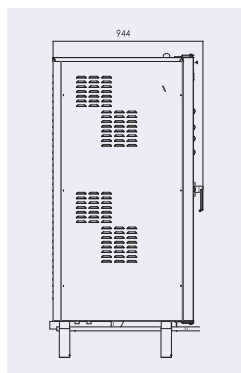

OKFG 101
Convection Oven

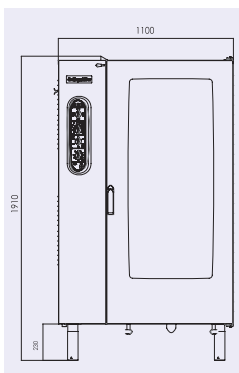

TYPE	CODE	Capacity	MODEL	Voltage	Power		Tray Shelves Distance	Max. Temp.	Water Inlet Dia.	Gas Inlet Dia.	Dimension (mm)	PRICE
					Gas	Electricity						
OKFG 202	7890.20G21.03	20 GN 2/1	GAS	230V/50Hz	40 kW	0.8 kW	68 mm	300	R 3/4"	R 1"	1100 x 944 x 2011	
OKFE 202	7890.20G21.01	20 GN 2/1	ELEC.	400V/50Hz	-	42 kW	68 mm	300	R 3/4"	-	1100 x 944 x 1910	
OKFG 102	7890.10G21.03	10 GN 2/1	GAS	230V/50Hz	30 kW	0.4 kW	68 mm	300	R 3/4"	R 3/4"	1100 x 930 x 1203	
OKFE 102	7890.10G21.01	10 GN 2/1	ELEC.	400V/50Hz	-	21 kW	68 mm	300	R 3/4"	-	1100 x 930 x 1057	
OKFG 101	7890.95701.03	10 GN 1/1	GAS	230V/50Hz	19 kW	0.3 kW	68 mm	300	R 3/4"	R 3/4"	900 x 816 x 1203	
OKFE 101	7890.10G11.01	10 GN 1/1	ELEC.	400V/50Hz	-	17 kW	68 mm	300	R 3/4"	-	900 x 816 x 1057	
OKFG 601	7890.6G110.03	6 GN 1/1	GAS	230V/50Hz	12 kW	0.3 kW	68 mm	300	R 3/4"	R 1/2"	900 x 816 x 913	
OKFE 601	7890.95708.01	6 GN 1/1	ELEC.	400V/50Hz	-	11 kW	68 mm	300	R 3/4"	-	900 x 816 x 767	

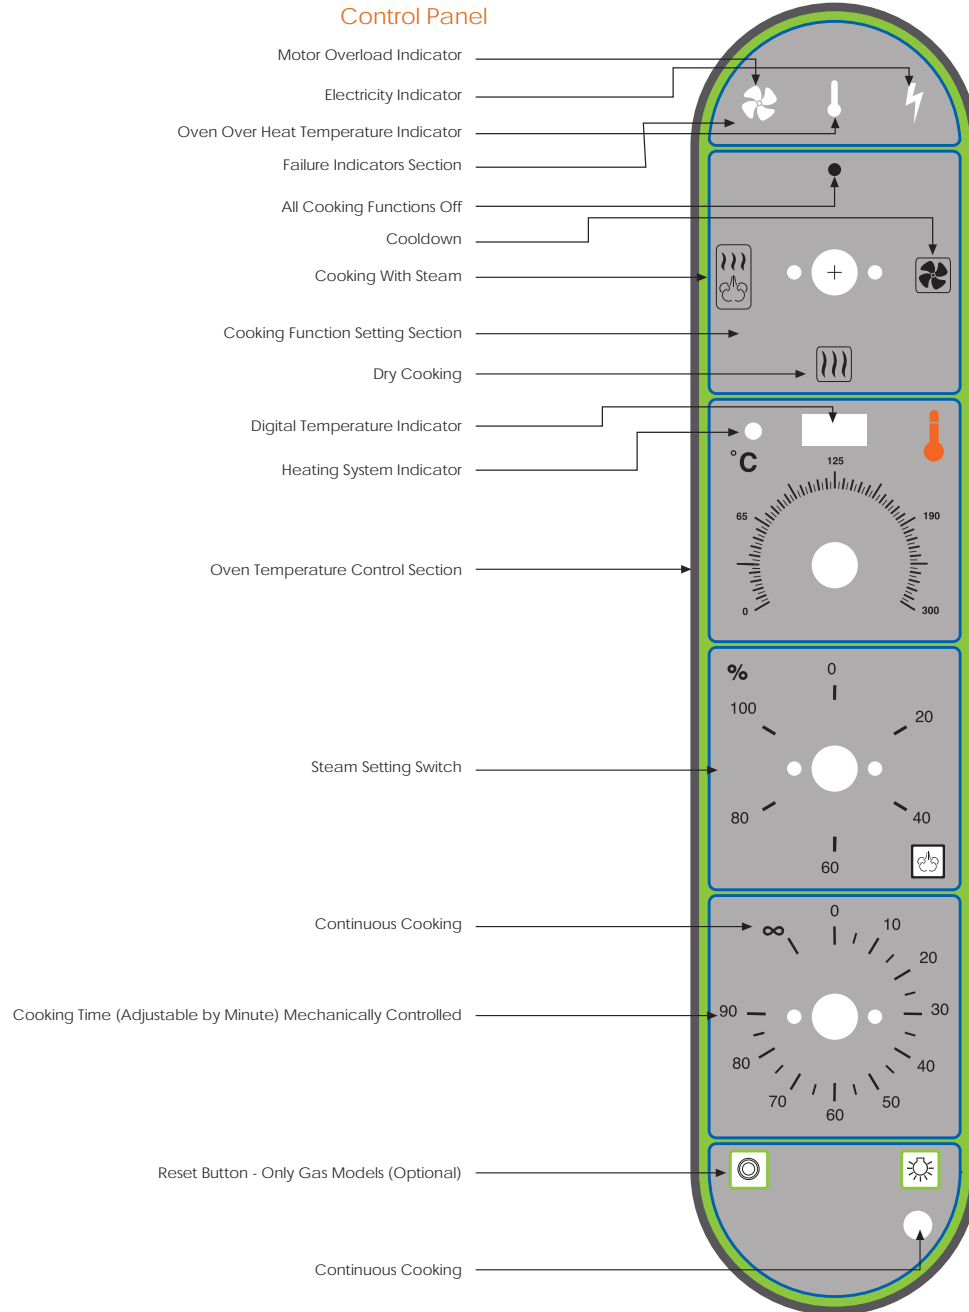

- 10 GN 1/1 – 20 GN 1/1 – 6 GN 1/1 capacity
- All gas models works with LPG and natural gas
- Gas and electrical models are available
- Stainless steel body and cooking cabinet
- Isolated heating cabinet for heat saving
- Safety thermostat against excessive heating inside cabinet
- Digital thermostat heat control
- Injection system for steam
- Silicon sealing on door to prevent heat escape from cabinet during operation.
- Integrated stainless steel fan for even cooking
- Safety door lock switch stops the oven if opened during operation.
- Double glazed, tempered, heat resistant door glass.
- Easy cleaning of cooking cabinet door glass inside.
- Four position function knob to cool down the cabinet when choosing with or without steam cooking.
- Secure gas valve with automatic lighting and pilot burner.
- 20 GN 1/1 adaptable to 10 GN 2/1



Counter Bench
(Demounted)
7911.08267.11



Counter Bench
(Demounted)
7911.10572.08



Oven Tray Kit
7895.10G21.TK



Trolley for Kit
7895.FK102.10




Trolley & Kit
7895.FK202.20

Ovens Accessories

CODE	L	W	H	WEI.	m ³		PRICE
7911.08267.11	850	610	600			for / OKFG 61 / OKFG 101 / OKFE 61 / OKFE 101	
7911.10572.08	1050	720	600			for / OKFG 102 / OKFE 102	
7895.FK102.10	594	980	853			for / OKFG 102 / OKFE 102	
7895.10G21.TK	580	650	700			for / OKFG 102 / OKFE 102	
7895.FK202.20	640	930	1560			for / OKFG 202 / OKFE 202	



OMD 9898
Prover Cabinet

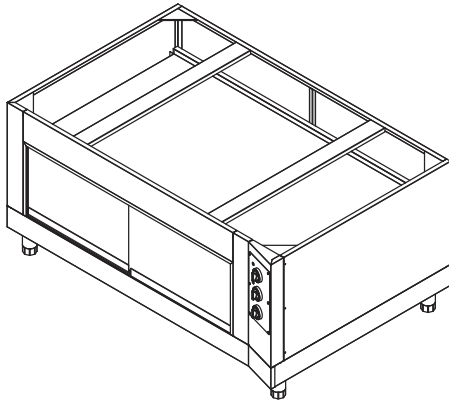

OMD 17170
Prover Cabinet



OBA 70180 MD
Prover Cabinet

Prover Cabinets

	TYPE	CODE	MODEL	L	W	H	POWER	IN.VOL.	TEMP.	CAP.	PRICE
	OMD 9898	7868.98987.MD	ELEC	982	987	736	1,75 kW	220-240V/50Hz	30 - 65 °C	12 pc 60x40cm TRAY	
	OMD 17170	7868.17107.MD	ELEC	1708	1070	830	1,75 kW	220-240V/50Hz	30 - 65 °C	12 pc 60x40cm TRAY	
	OBA 70180 MD	7919.70180.MD	ELEC	770	900	1760	3 kW	220-240V/50Hz	30 - 65 °C	12 pc 60x40cm TRAY	



OPBF 8085 
Electrical Pastry / Cake Oven



OPBFG 8085.03

Gas Pastry / Cake Oven

- **Stainless steel**
- **Special designed door with tempered glass**
- **Oven tray capacity 4 pcs. GN 2/1**

Gas Pastry-Cake Oven

TYPE	CODE	MODEL	L	W	H	BURNER	kW	kcal/h	BTU/h	G20 (m³/h)	G25 (m³/h)	G30 (kg/h)	OVEN	POWER	WEI.	 m³	PRICE
 OPBFG 8085.03	7890.88160.03	GAS Sec.Ventil	800	850	1600	3x5	15	12900	51180	1.58	1.84	1.18	-	15 kW	90 kg.	1.38 m³	

TYPE	CODE	L	W	H	POWER	TEMP.	WEIGHT	VOL.	 m³	PRICE
 OPBFE 8085	7890.88160.02	800	850	1600	6 kW	50-300°C	90 kg.	400V. / 50Hz.	1.38 m³	