



OBK 2000



Conveyor Type Dishwasher



- Stainless Steel Body including washing and boiler tank
- Hygienic washing tank
- 133 racks per hour (Rack dimension 50 x 50)
- Effective drying through a high powered fan
- 3 l water consumption per cycle
- Automatic, user friendly control panel
- Continuous Washing through Conveyor System with dryer
- Saves energy, detergent and water
- Stainless steel washing arms
- Adjustable feet for height optimization
- Easy start up: Single button for water filling and heating in the boiler tank
- Electrical components and cabling according to international standards and safety regulations.
- Completely sealed to guarantee IPX5 water protection
- Thermostat-controlled rinsing and washing temperatures for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

STANDART EQUIPMENT

Stainless Steel Washing Arms
Rinsing Pump
5 Baskets Promotional (3x Plate, 1x Glass and 1x Cutlery)
Flexible Water Supply and Drain Hose

OPTIONAL EQUIPMENT

Drain Pump
Detergent Dispenser
Rinse Aid Dispenser

Technical Features

OBK 2000

Code	0710.02000.01 right /0710.02000.02 left
Total power	48 kW
Electricity connection	400 V 3NPE 50 Hz
Washing capacity (Plate/hr)	2130
Washing capacity (Basket/hr)	133
Pre-wash / Main wash tank capacity	60/90
Boiler tank capacity	17
Washing water temp.	55 - 60 °C
Rinsing water temp.	80-85 °C
Water inlet connection	3/4"
Rack dimension	50x50
Water inlet pressure / Temp.	2-4/ 50 °C
Reductor power	0.25 kW
Pre-wash / Main wash power	0.72 kW/1.5 kW
Rinsing pump power	0.37 kW
Drying fan power	0.55 kW
Heat power (Wash/Rins/Dry)	9/27/8 kW
Dirty water discharge connection	1 1/4"(Ø 42mm)
Max.noise	85
Gross weight	320 (±5)
Dimensions(LxWxD)	800x2570x1880
Protection class	IPX5
Loading height	42
Price	



OBK 1500



Conveyor Type Dishwasher



- Stainless Steel Body including washing and boiler tank
- Hygienic washing tank
- 100 racks per hour (Rack dimension 50 x 50)
- Effective drying through a high powered fan
- 3 l water consumption per cycle
- Automatic, user friendly control panel
- Continuous Washing through Conveyor System with dryer
- Saves energy, detergent and water
- Stainless steel washing arms
- Adjustable feet for height optimization
- Easy start up: Single button for water filling and heating in the boiler tank
- Electrical components and cabling according to international standards and safety regulations.
- Completely sealed to guarantee IPX5 water protection
- Thermostat-controlled rinsing and washing temperatures for efficient washing
- Non-return - Check valve System
- Washing temperature at 55-60°C (water supply at a minimum of 2 bar and 50°C)
- Rinsing temperature at 80-85°C (water supply at a minimum of 2 bar and 50°C)

STANDART EQUIPMENT

Stainless Steel Washing Arms
Rinsing Pump
5 Baskets Promotional (3x Plate, 1x Glass and 1x Cutlery)
Flexible Water Supply and Drain Hose

OPTIONAL EQUIPMENT

Drain Pump
Detergent Dispenser
Rinse Aid Dispenser

Technical Features	OBK 1500
Code	0710.01500.02 right /0710.01500.03 left
Total power	47 kW
Electricity connection	400 V 3NPE 50 Hz
Washing capacity (Plate/hr)	1650
Washing capacity (Basket/hr)	100
Pre-wash / Main wash tank capacity	90
Boiler tank capacity	17
Washing water temp.	55 - 60 °C
Rinsing water temp.	80-85 °C
Water inlet connection	3/4"
Rack dimension	50x50
Water inlet pressure / Temp.	2-4/ 50 °C
Reductor power	0.25 kW
Main wash power	1.5 kW
Rinsing pump power	0.37 kW
Drying fan power	0.55 kW
Heat power (Wash/Rins/Dry)	9/27/8 kW
Dirty water discharge connection	1 1/4" (Ø 42mm)
Max.noise	85
Gross weight	270 (±5)
Dimensions(LxWxD)	800x2050x1880
Protection class	IPX5
Loading height	42
Price	



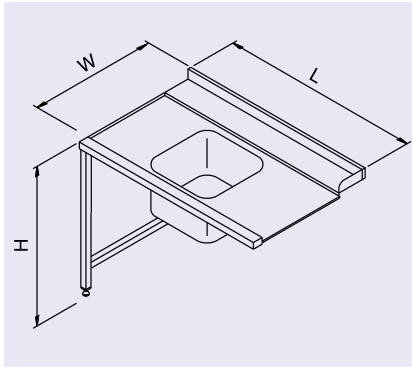
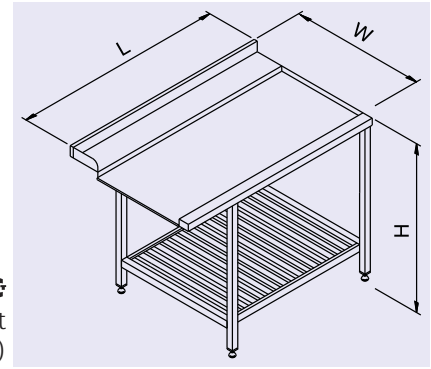
Conveyor Bench

0711.00000.01



0711.00000.00

The conveyor benches are manufactured according to the customer demands.

Dishwasher Inlet
Tablet (left)Dishwasher Outlet
Table (right)

CODE	L	W	H	m ³	PRICE
7711.07075.22	700	750	850	0.54 m ³	
7711.09075.22	900	750	850	0.67 m ³	
7711.12075.22	1200	750	850	0.90 m ³	
7711.14075.22	1400	750	850	1.05 m ³	
7711.16075.22	1600	750	850	1.19 m ³	
7711.19075.22	1900	750	850	1.40 m ³	

CODE	L	W	H	m ³	PRICE
7711.07075.13	700	750	850	0.54 m ³	
7711.09075.13	900	750	850	0.67 m ³	
7711.12075.13	1200	750	850	0.90 m ³	
7711.14075.13	1400	750	850	1.05 m ³	
7711.16075.13	1600	750	850	1.19 m ³	
7711.19075.13	1900	750	850	1.40 m ³	



Pre-wash hose



Basket basket



Basket

OBK 2000

STANDARD ACCESSORIES

EXTRA ACCESSORIES

- 5 washing baskets.

- Spare rack (for plates, glasses and cutlery).
- Feeding and collecting benches.
- Detergent and brightener dispenser.
- Pre-wash hose.
- Optional drier unit (8.55 kw)
- Basket rack trolley.
- Conveyor bench.