



Clean-Free Condenser

Wire-frame special condenser
Clean-free condenser guarantees high performance at all times.



Easypack

Easy handling cooling system for after sales services
Maximum internal capacity and minimal temperature increase during defrost.



Efficient air circulation
Most efficient air distribution inside with a specially designed air channel.



Height adjustable stainless steel legs
Marine type legs or swivelling wheels both as an option



Rounded corners for maximum hygiene
Facilitate easy cleaning and more hygienic inner structure



CFC-Free cooling gas

High efficient Mono-block refrigeration system

Low energy compressors
Large surface area evaporator, electrostatically painted to prevent corrosion
High efficient fans
CFC-Free cooling gas R134A/R404A



Smart Defrost

HACCP digital control panel

High/Low temperature alarm and high condenser temperature alarm saving/display. Basic humidity control function and MODBUS protocol supplied. Enable networking with central data logging and alarm systems
Less energy consumption is realised thanks to smart defrost



Removable gasket

Wide magnetic removable gasket, with triple insulation area, provides an effective seal which reduces heat lost.



HFC-Free Polyurethane

60 mm insulated walls

40-42 kg/m³ density environment friendly HFC-Free Polyurethane insulation for low energy consumption



IPX5 water protection

Full frontal water-proof design.





TA 260.00 NMV
SN 325x430 Size Refrigerated Counter With Double Door

TA 260.00 LMV
SN 325x430 Size Freezer Counter With Double Door

TA 360.00 NMV
SN 325x430 Size Refrigerated Counter With 3 Doors

TA 360.00 LMV
SN 325x430 Size Freezer Counter With 3 Doors



TA 260.01 NMV
SN 325x430 Size Refrigerated Counter With Double Glass Door

TA 360.01 NMV
SN 325x430 Size Refrigerated Counter With 3 Glass Doors

SN 325x430 Size Refrigerated Counters With Inox Doors

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.00 NMV	7919.26NMV.00	ELEC	600	1420	850	252 lt	-2 / +8 °C	0.30 kW	220V/50Hz	122 kg.	1.21 m ³	
	TA 360.00 NMV	7919.36NMV.00	ELEC	600	1880	850	380 lt	-2 / +8 °C	0.39 kW	220V/50Hz	145 kg.	1.57 m ³	
	TA 460.00 NMV	7919.46NMV.00	ELEC	600	2340	850	518 lt	-2 / +8 °C	0.44 kW	220V/50Hz	176 kg.	1.95 m ³	

SN 325x430 Size Freezer Counters With Inox Doors

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.00 LMV	7919.26LMV.00	ELEC	600	1420	850	252 lt	-5 / -20 °C	0.50 kW	220V/50Hz	127 kg.	1.21 m ³	
	TA 360.00 LMV	7919.36LMV.00	ELEC	600	1880	850	380 lt	-5 / -20 °C	0.60 kW	220V/50Hz	154 kg.	1.57 m ³	
	TA 460.00 LMV	7919.46LMV.00	ELEC	600	2340	850	518 lt	-5 / -20 °C	0.75 kW	220V/50Hz	182 kg.	1.95 m ³	

SN 325x430 Size Refrigerated Counters With Glass Doors

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.01 NMV	7919.26NMV.01	ELEC	600	1420	850	252 lt	-2 / +8 °C	0.31 kW	220V/50Hz	122 kg.	1.21 m ³	
	TA 360.01 NMV	7919.36NMV.01	ELEC	600	1880	850	380 lt	-2 / +8 °C	0.41 kW	220V/50Hz	149 kg.	1.57 m ³	
	TA 460.01 NMV	7919.46NMV.01	ELEC	600	2340	850	518 lt	-2 / +8 °C	0.75 kW	220V/50Hz	1.82 kg.	1.95 m ³	

LMV: Vantilated monoblock refrigeration at low temperature. / NMV: Vantilated monoblock refrigeration at regular temperature.



TA 260.02 NMV

SN 325x430 Size Refrigerated Counter With 4 Drawers

TA 260.02 LMV

SN 325x430 Size Freezer Counter With 4 Drawers

TA 360.02 NMV
SN 325x430 Size Refrigerated Counter With 6 Drawers

TA 360.02 LMV
SN 325x430 Size Freezer Counter With 6 Drawers



SN 325x430 Size Refrigerated Counters With 1/2 Drawers

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.02 NMV	7919.26NMV.02	ELEC	600	1420	850	252 lt	-2 / +8 °C	0.31 kW	220V/50Hz	150 kg.	1.21 m ³	
	TA 360.02 NMV	7919.36NMV.02	ELEC	600	1880	850	380 lt	-2 / +8 °C	0.39 kW	220V/50Hz	191 kg.	1.57 m ³	
	TA 460.02 NMV	7919.46NMV.02	ELEC	600	2340	850	518 lt	-2 / +8 °C	0.44 kW	220V/50Hz	232 kg.	1.95 m ³	

NMV: Vantilated monoblock refrigeration at regular temperature.

SN 325x430 Size Freezer Counters With 1/2 Drawers

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.02 LMV	7919.26LMV.02	ELEC	600	1420	850	252 lt	-5 / -20 °C	0.5 kW	220V/50Hz	155 kg.	1.21 m ³	
	TA 360.02 LMV	7919.36LMV.02	ELEC	600	1880	850	380 lt	-5 / -20 °C	0.6 kW	220V/50Hz	196 kg.	1.57 m ³	
	TA 460.02 LMV	7919.46LMV.02	ELEC	600	2340	850	518 lt	-5 / -20 °C	0.75 kW	220V/50Hz	238 kg.	1.95 m ³	

LMV: Vantilated monoblock refrigeration at low temperature.



TA 260.03 NMV SN 325x430 Size Refrigerated Counter With 6 Drawers

TA 260.03 LMV SN 325x430 Size Freezer Counter With 6 Drawers

TA 360.03 NMV SN 325x430 Size Refrigerated Counter With 9 Drawers

TA 360.03 LMV SN 325x430 Size Freezer Counter With 9 Drawers



SN 325x430 Size Refrigerated Counters With 1/3 Drawers

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.03 NMV	7919.26NMV.03	ELEC	600	1420	850	252 lt	-2 / +8 °C	0.39 kW	220V/50Hz	162 kg.	1.21 m ³	
	TA 360.03 NMV	7919.36NMV.03	ELEC	600	1880	850	380 lt	-2 / +8 °C	0.44 kW	220V/50Hz	209 kg.	1.57 m ³	
	TA 460.03 NMV	7919.46NMV.03	ELEC	600	2340	850	518 lt	-2 / +8 °C	0.52 kW	220V/50Hz	256 kg.	1.95 m ³	


NMV: Vantilated monoblock refrigeration at regular temperature.

SN 325x430 Size Freezer Counters With 1/3 Drawers


	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TA 260.03 LMV	7919.26LMV.03	ELEC	600	1420	850	252 lt	-5 / -20 °C	0.60 kW	220V/50Hz	167 kg.	1.21 m ³	
	TA 360.03 LMV	7919.36LMV.03	ELEC	600	1880	850	380 lt	-5 / -20 °C	0.72 kW	220V/50Hz	214 kg.	1.57 m ³	
	TA 460.03 LMV	7919.46LMV.03	ELEC	600	2340	850	518 lt	-5 / -20 °C	0.77 kW	220V/50Hz	262 kg.	1.95 m ³	

LMV: Vantilated monoblock refrigeration at low temperature.


TA 260

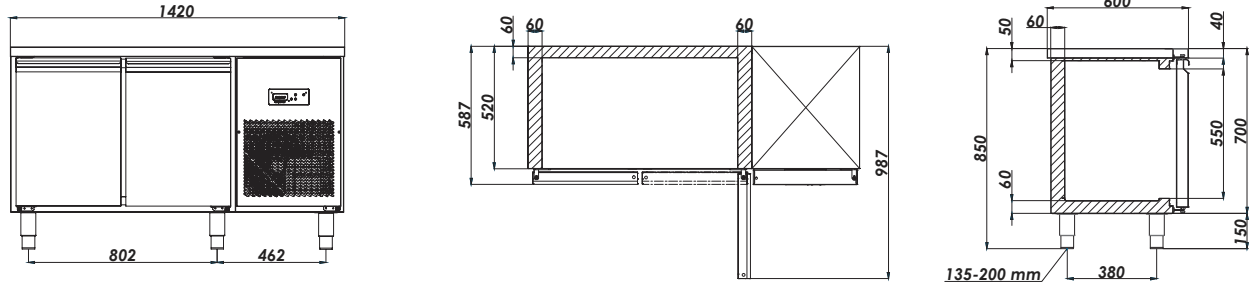

TA 360

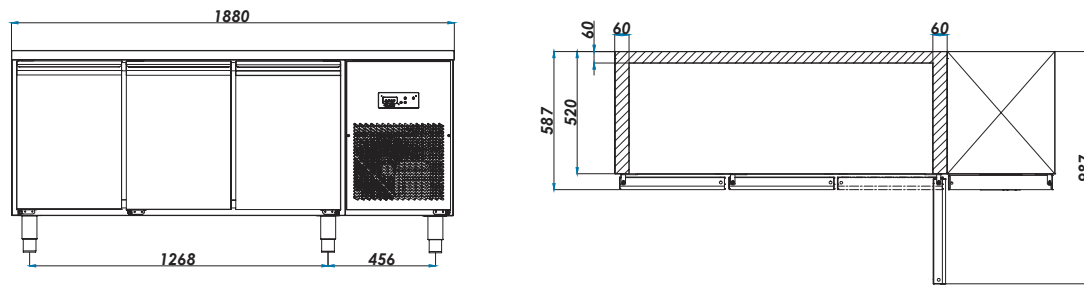

TA 460

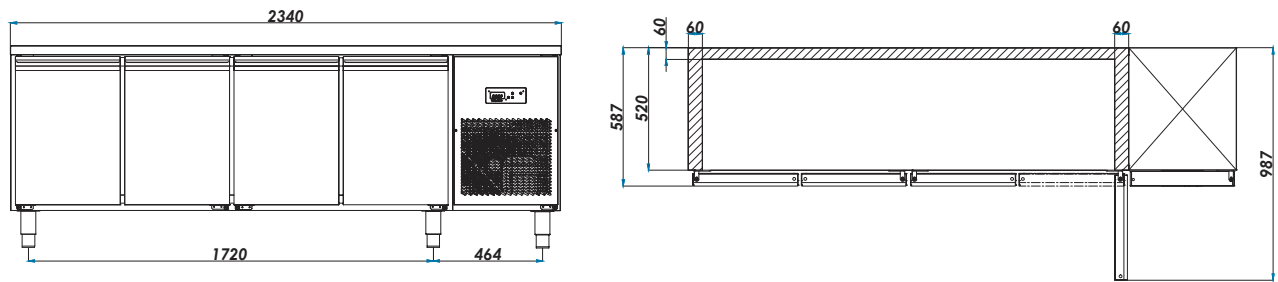

600 SERIES SN 325x430 REFRIGERATED COUNTERS

Model	Temp. Range	Approved for	Refrigerant
NMV Series	-2 / +8	Climate Rating T	R134a or Natural Refrigerant
LMV Series	-5 / -20	Climate Rating T	R404a or Natural Refrigerant



TAG 270.00 NMV
GN 1/1 Size Refrigerated Counter With Double Door

TAG 270.00 LMV **TÜV-CB**
GN 1/1 Size Freezer Counter With Double Door

TAG 370.00 NMV
GN 1/1 Size Refrigerated Counter With 3 Doors

TAG 370.00 LMV **TÜV-CB**
GN 1/1 Size Freezer Counter With 3 Doors



TAG 270.01 NMV
GN 1/1 Size Refrigerated Counter With Double Glass Door

TAG 370.01 NMV
GN 1/1 Size Refrigerated Counter With 3 Glass Door

GN 1/1 Size Refrigerated Counters With Inox Doors

TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
TAG 270.00 NMV	7919.27NMV.00	ELEC	700	1420	850	301 lt	-2 / +8 °C	0.30 kW	220V/50Hz	144 kg.	1.32 m ³	
TAG 370.00 NMV	7919.37NMV.00	ELEC	700	1880	850	457 lt	-2 / +8 °C	0.39 kW	220V/50Hz	177 kg.	1.78 m ³	
TAG 470.00 NMV	7919.47NMV.00	ELEC	700	2340	850	625 lt	-2 / +8 °C	0.44 kW	220V/50Hz	206 kg.	2.21 m ³	

NMV: Vantilated monoblock refrigeration at regular temperature.

GN 1/1 Size Freezer Counters With Inox Doors

TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
TAG 270.00 LMV	7919.27LMV.00	ELEC	700	1420	850	301 lt	-5 / -20 °C	0.5 kW	220V/50Hz	149 kg.	1.32 m ³	
TAG 370.00 LMV	7919.37LMV.00	ELEC	700	1880	850	457 lt	-5 / -20 °C	0.6 kW	220V/50Hz	182 kg.	1.78 m ³	
TAG 470.00 LMV	7919.47LMV.00	ELEC	700	2340	850	625 lt	-5 / -20 °C	0.75 kW	220V/50Hz	212 kg.	2.21 m ³	

LMV: Vantilated monoblock refrigeration at low temperature.

GN 1/1 Size Refrigerated Counters With Glass Doors

TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
TAG 270.01 NMV	7919.27NMV.01	ELEC	700	1420	850	301 lt	-2 / +8 °C	0.31 kW	220V/50Hz	144 kg.	1.32 m ³	
TAG 370.01 NMV	7919.37NMV.01	ELEC	700	1880	850	457 lt	-2 / +8 °C	0.41 kW	220V/50Hz	177 kg.	1.78 m ³	
TAG 470.01 NMV	7919.47NMV.01	ELEC	700	2340	850	625 lt	-2 / +8 °C	0.47 kW	220V/50Hz	206 kg.	2.21 m ³	

NMV: Vantilated monoblock refrigeration at regular temperature.



TAG 270.02 NMV

GN 1/1 Size Refrigerated Counter With 4 Drawers

TAG 270.02 LMV

GN 1/1 Size Freezer Counter With 4 Drawers

TAG 370.02 NMV
GN 1/1 Size Refrigerated Counter With 6 DrawersTAG 370.02 LMV
GN 1/1 Size Freezer Counter With 6 Drawers

GN 1/1 Size Refrigerated Counters With 1/2 Drawers

TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m³	PRICE
TAG 270.02 NMV	7919.27NMV.02	ELEC	700	1420	850	301 lt	-2 / +8 °C	0.30 kW	220V/50Hz	172 kg.	1.32 m³	
TAG 370.02 NMV	7919.37NMV.02	ELEC	700	1880	850	457 lt	-2 / +8 °C	0.39 kW	220V/50Hz	219 kg.	1.78 m³	
TAG 470.02 NMV	7919.47NMV.02	ELEC	700	2340	850	625 lt	-2 / +8 °C	0.44 kW	220V/50Hz	262 kg.	2.21 m³	

NMV: Vantilated monoblock refrigeration at regular temperature.

GN 1/1 Size Freezer Counters With 1/2 Drawers

TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m³	PRICE
TAG 270.02 LMV	7919.27LMV.02	ELEC	700	1420	850	301 lt	-5 / -20 °C	0.5 kW	220V/50Hz	177 kg.	1.32 m³	
TAG 370.02 LMV	7919.37LMV.02	ELEC	700	1880	850	457 lt	-5 / -20 °C	0.6 kW	220V/50Hz	224 kg.	1.78 m³	
TAG 470.02 LMV	7919.47LMV.02	ELEC	700	2340	850	625 lt	-5 / -20 °C	0.75 kW	220V/50Hz	268 kg.	2.21 m³	

LMV: Vantilated monoblock refrigeration at low temperature.



TAG 270.03 NMV
GN 1/1 Size Refrigerated Counter With 6 Drawers

TAG 270.03 LMV
GN 1/1 Size Freezer Counter With 6 Drawers

TAG 370.03 NMV
GN 1/1 Size Refrigerated Counter
With 9 Drawers

TAG 370.03 LMV
GN 1/1 Size Freezer Counter
With 9 Drawers



GN 1/1 Size Refrigerated Counters With 1/3 Drawers

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TAG 270.03 NMV	7919.27NMV.03	ELEC	700	1420	850	301 lt	-2 / +8 °C	0.39 kW	220V/50Hz	184 kg.	1.32 m ³	
	TAG 370.03 NMV	7919.37NMV.03	ELEC	700	1880	850	457 lt	-2 / +8 °C	0.44 kW	220V/50Hz	237 kg.	1.78 m ³	
	TAG 470.03 NMV	7919.47NMV.03	ELEC	700	2340	850	625 lt	-2 / +8 °C	0.52 kW	220V/50Hz	286 kg.	2.21 m ³	


NMV: Vantilated monoblock refrigeration at regular temperature.

GN 1/1 Size Freezer Counters With 1/3 Drawers


	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	TAG 270.03 LMV	7919.27LMV.03	ELEC	700	1420	850	301 lt	-5 / -20 °C	0.6 kW	220V/50Hz	189 kg.	1.32 m ³	
	TAG 370.03 LMV	7919.37LMV.03	ELEC	700	1880	850	457 lt	-5 / -20 °C	0.72 kW	220V/50Hz	242 kg.	1.78 m ³	
	TAG 470.03 LMV	7919.47LMV.03	ELEC	700	2340	850	625 lt	-5 / -20 °C	0.77 kW	220V/50Hz	292 kg.	2.21 m ³	

LMV: Vantilated monoblock refrigeration at low temperature.


TAG 270

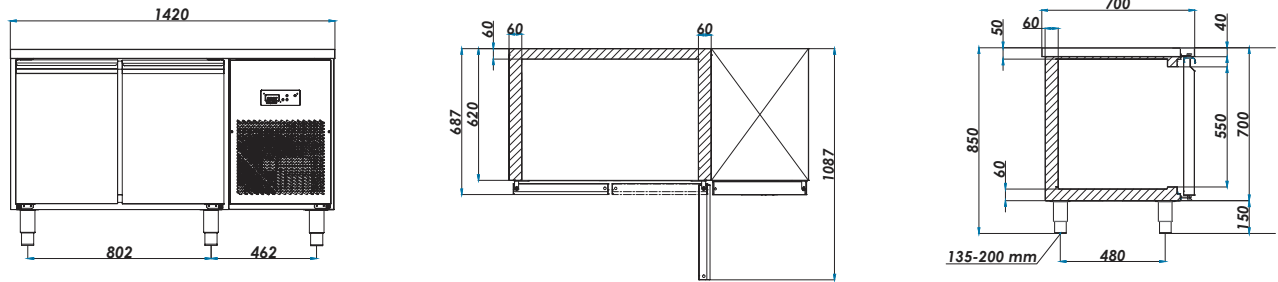

TAG 370

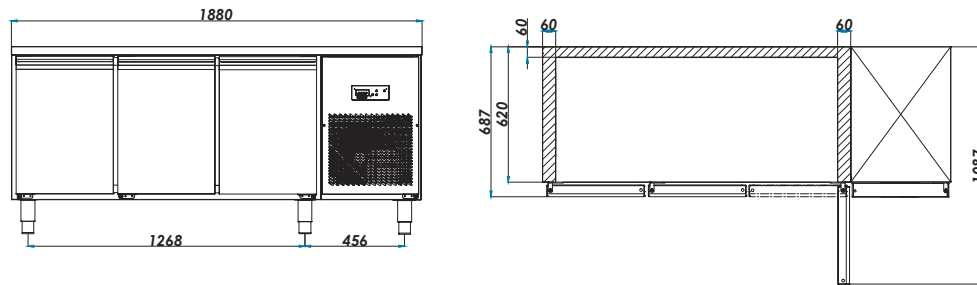

TAG 470

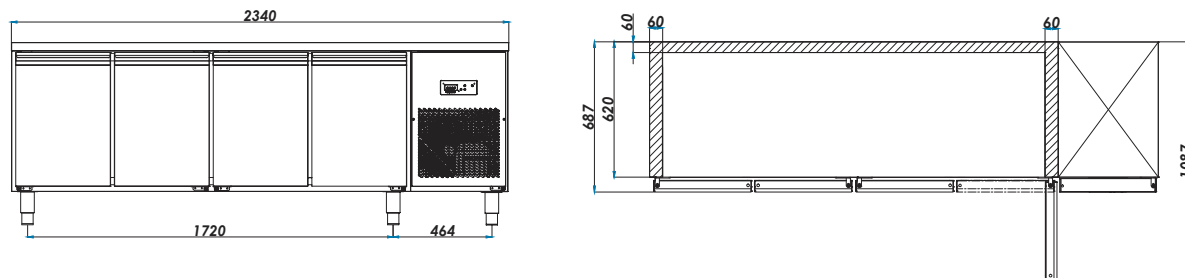

700 SERIES GN 1/1 REFRIGERATED COUNTERS

Model	Temp. Range	Approved for	Refrigerant
NMV Series	-2 / +8	Climate Rating T	R134a or Natural Refrigerant
LMV Series	-5 / -20	Climate Rating T	R404a or Natural Refrigerant



CTA 360.01 NTS
SN 325x430 Size Refrigerated Undercounter
With 3 Doors

CTAG 370.01 NTS
GN 1/1 Size Refrigerated Undercounter
With 3 Doors

CTA 260.01 NTS
SN 325x430 Size Refrigerated Undercounter With Double Doors

CTAG 270.01 NTS
GN 1/1 Size Refrigerated Undercounter With Double Doors



Standard:

- Stainless steel.
- 50 mm insulation thickness
- Environment friendly insulation polyurethane injection at the density of 40-42 kg/m3.
- Automatic defrost water tray.
- HACCP Digital thermometer thermostat.
- The refrigeration system is static cooled.
- Adjustable feet.
- Cooling gas CFC Free: R134A

Refrigerated Under Counters With Inox Doors

	TYPE	CODE	MODEL	L	W	H	NET CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	CTA 260.01 NTS	7919.26NTS.C1	ELEC	600	1420	600	136 lt	-2 / +8 °C	0.26 kW	220V/50Hz	88 kg.	0.89 m ³	
	CTA 360.01 NTS	7919.36NTS.C1	ELEC	600	1880	600	215 lt	-2 / +8 °C	0.30 kW	220V/50Hz	114 kg.	1.19 m ³	
	CTA 460.01 NTS	7919.46NTS.C1	ELEC	600	2400	600	295 lt	-2 / +8 °C	0.35 kW	220V/50Hz	131 kg.	1.5 m ³	
	CTAG 270.01 NTS	7919.27NTS.01	ELEC	700	1420	600	170 lt	-2 / +8 °C	0.26 kW	220V/50Hz	100 kg.	1 m ³	
	CTAG 370.01 NTS	7919.37NTS.01	ELEC	700	1880	600	265 lt	-2 / +8 °C	0.30 kW	220V/50Hz	126 kg.	1.35 m ³	
	CTA 470.01 NTS	7919.47NTS.01	ELEC	700	2400	600	365 lt	-2 / +8 °C	0.35 kW	220V/50Hz	146 kg.	1.72 m ³	

NTS: Static refrigeration at regular temperature.



CTA 360.03 NTS    
SN 325x430 Size Refrigerated Undercounter
With 6 Drawers

CTAG 370.03 NTS    
GN 1/1 Size Refrigerated Undercounter
With 6 Drawers

CTA 260.03 NTS    
SN 325x430 Size Refrigerated Undercounter With 4 Drawers

CTAG 270.03 NTS    
GN 1/1 Size Refrigerated Undercounter With 4 Drawers





Counter Type Refrigerators With Drawers

	TYPE	CODE	MODEL	L	W	H	CAPACITY	TEMP. RANGE	POWER	VOLTAGE	WEIGHT	m ³	PRICE
	CTA 260.03 NTS	7919.26NTS.C3	ELEC	600	1420	600	138 lt	-2 / +8 °C	0.28 kW	220V/50Hz	104 kg.	0.89 m ³	
	CTA 360.03 NTS	7919.36NTS.C3	ELEC	600	1880	600	215 lt	-2 / +8 °C	0.36 kW	220V/50Hz	138 kg.	1.19 m ³	
	CTA 460.03 NTS	7919.46NTS.C3	ELEC	600	2400	600	295 lt	-2 / +8 °C	0.40 kW	220V/50Hz	163 kg.	1.5 m ³	
	CTAG 270.03 NTS	7919.27NTS.C3	ELEC	700	1420	600	170 lt	-2 / +8 °C	0.28 kW	220V/50Hz	116 kg.	1 m ³	
	CTAG 370.03 NTS	7919.37NTS.C3	ELEC	700	1880	600	265 lt	-2 / +8 °C	0.36 kW	220V/50Hz	150 kg.	1.35 m ³	
	CTA 470.03 NTS	7919.47NTS.C3	ELEC	700	2400	600	365 lt	-2 / +8 °C	0.40 kW	220V/50Hz	178 kg.	1.72 m ³	

NTS: Static refrigeration at regular temperature.

WORK TOP OPTIONS FOR REFRIGERATED COUNTERS AND UNDER-COUNTERS

	Approved For	INOX			MARBLE			POLYETHYLENE			GRANITE		
		TYPE	CODE	PRICE	TYPE	CODE	PRICE	TYPE	CODE	PRICE	TYPE	CODE	PRICE
Flat Table 	TA 260	TABL.TA260.01	7920.14260.01		TABL.TA260.02	7920.14260.02		TABL.TA260.27	7920.14260.27		TABL.TA260.37	7920.14260.37	
	TA 360	TABL.TA360.01	7920.18860.01		TABL.TA360.02	7920.18860.02		TABL.TA360.27	7920.18860.27		TABL.TA360.37	7920.18860.37	
	TA 460	TABL.TA460.01	7920.24060.01		TABL.TA460.02	7920.24060.02		TABL.TA460.27	7920.24060.27		TABL.TA460.37	7920.24060.37	
	TAG 270	TABL.TA270.01	7920.14270.01		TABL.TA270.02	7920.14270.02		TABL.TA270.27	7920.14270.27		TABL.TA270.37	7920.14270.37	
	TAG 370	TABL.TA370.01	7920.18870.01		TABL.TA370.02	7920.18870.02		TABL.TA370.27	7920.18870.27		TABL.TA370.37	7920.18870.37	
	TAG 470	TABL.TA470.01	7920.24070.01		TABL.TA470.02	7920.24070.02		TABL.TA470.27	7920.24070.27		TABL.TA470.37	7920.24070.37	
Table with Splashback 	TA 260	TABL.TA260.03	7920.14260.03		TABL.TA260.04	7920.14260.04		TABL.TA260.28	7920.14260.28		TABL.TA260.38	7920.14260.38	
	TA 360	TABL.TA360.03	7920.18860.03		TABL.TA360.04	7920.18860.04		TABL.TA360.28	7920.18860.28		TABL.TA360.38	7920.18860.38	
	TA 460	TABL.TA460.03	7920.24060.03		TABL.TA460.04	7920.24060.04		TABL.TA460.28	7920.24060.28		TABL.TA460.38	7920.24060.38	
	TAG 270	TABL.TA270.03	7920.14270.03		TABL.TA270.04	7920.14270.04		TABL.TA270.28	7920.14270.28		TABL.TA270.38	7920.14270.38	
	TAG 370	TABL.TA370.03	7920.18870.03		TABL.TA370.04	7920.18870.04		TABL.TA370.28	7920.18870.28		TABL.TA370.38	7920.18870.38	
	TAG 470	TABL.TA470.03	7920.24070.03		TABL.TA470.04	7920.24070.04		TABL.TA470.28	7920.24070.28		TABL.TA470.38	7920.24070.38	